



Capacitive evaluation unit - KFA - Slave Series PER LEVEL[®] Relay output

- For capacitive filling level probes with 1, 2 or 3 limit value switching points KFS-5-...-Y76
- Operating voltage 115 / 230 V AC
- Extension for 3 limit value switching points



Certificate:



Technical Data

Output function	3 x change-over contact
Type	KFA-5-3-S-III
Art.-No.	977 2101
Connection diagram No.	see below
Operating voltage (U _B)	105...125/207...253 V AC 50/60 Hz
Contact rating each relay	max. 120 V DC/1A-250 V AC/4A
Permitted residual ripple max.	-
Power consumption	typ. 3 VA
Permitted ambient temperature	-25...+55°C
LED - Display	green / U _B standby
LED - Display	3 x yellow / filling level
Protective circuit	-
Degree of protection IEC 529	IP 20
Connection	screwing clamp terminals and SMB-sockets
Housing material	ABS

A T-connection device with SMB sockets for the extension of several slaves is available as accessory (see page 49).

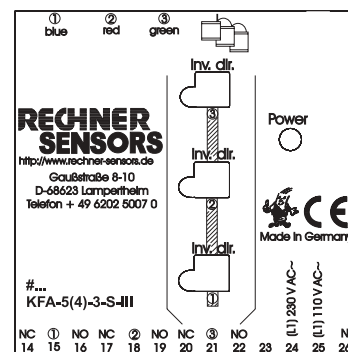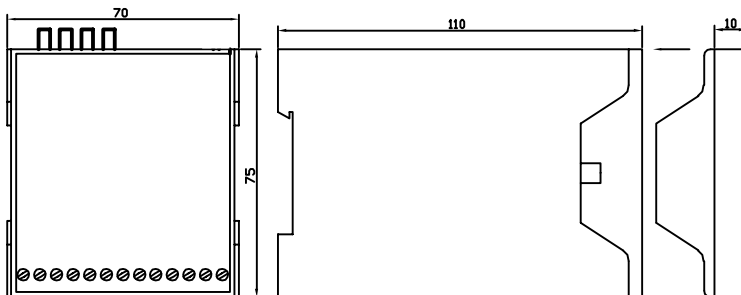

All specifications are subject to change without notice. (10/2004)